


**Ball Valve 6-way
06-250-232
Selector**

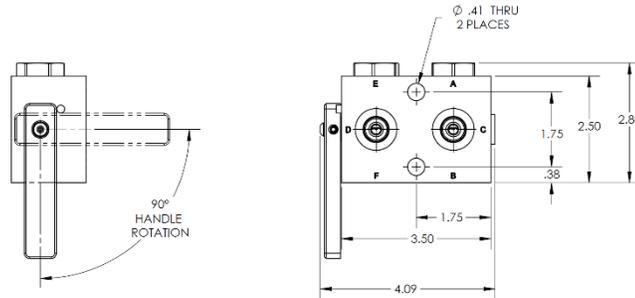

Description:


Pressure-balanced 6-way low leakage ¼ turn ball valve.

Features:

- Ideal for controlling 2 loaded systems using only one power unit
- Easy SAE ORB port connections
- Plated alloy steel and anodized aluminum construction
- Handle included
- Patented pressure-balanced ball seats enables the valve to actuate under pressure

Specifications:

- Maximum Operating Pressure: 3000 psi
- Nominal Flow Capacity: 6 GPM
- Operating Temperatures Range: -40 °F to 210 °F
- Fluids: Mineral Based Hydraulic Fluids
- Seals: Specialized Polymer Seats and seals with Nitrile Orings and PTFE backups



Ordering Information:

Assembly Part Number	Ordering Options
06-250-232	

Bridon Industries, Inc
1157 Valley Park Drive Suite 125 Shakopee, MN 55379
Tel: 952 470-6179 Fax: 952 767-6703
Visit us at www.bridonindustries.com